


4000-40MD3 (oil-less)

| | | | | | | | | | | | | |
|-----------------------------|----------|-------|-------|-------|-------|-------|-------|-------|---------------------|---------------------|--|--|
| Voltage | V | 200 | 200 | 230 | 230 | 3x200 | 3x200 | 3x208 | 3x400 ²⁾ | 3x440 ²⁾ | | |
| Frequency | Hz | 50 | 60 | 50 | 60 | 50 | 60 | 60 | 50 | 60 | | |
| Motor | HP | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | | |
| | kW | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | 2.2 | | |
| Displacement ³⁾ | l/min | 352 | 424 | 352 | 424 | 352 | 424 | 424 | 352 | 424 | | |
| | CFM | 12.43 | 14.97 | 12.43 | 14.97 | 12.43 | 14.97 | 14.97 | 12.43 | 14.97 | | |
| FAD @ 8 bar ³⁾ | l/min | 180 | 220 | 180 | 220 | 180 | 220 | 220 | 180 | 220 | | |
| | CFM | 6.36 | 7.77 | 6.36 | 7.77 | 6.36 | 7.77 | 7.77 | 6.36 | 7.77 | | |
| Max. pressure ¹⁾ | bar | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | | |
| | psi | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | | |
| Max. current | A | 16.4 | 17.6 | 16.0 | 16.6 | 12.8 | 12.8 | 12.8 | 7.2 | 7.2 | | |
| Tank size | litres | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | | |
| | gallon | 10.6 | 10.6 | 10.6 | 10.6 | 10.6 | 10.6 | 10.6 | 10.6 | 10.6 | | |
| Weight | kg | 160 | 160 | 160 | 160 | 160 | 160 | 160 | 160 | 160 | | |
| | lbs | 353 | 353 | 353 | 353 | 353 | 353 | 353 | 353 | 353 | | |
| Noise level | dB(A)/1m | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | 55 | | |
| Thermal protection | | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | |
| Duty cycle | | 100% | 100% | 100% | 100% | 100% | 100% | 100% | 100% | 100% | | |

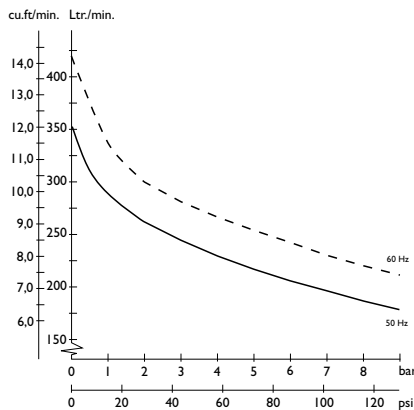

Dimensions (l x w x h)
661 x 774 x 856 mm / 26 x 30^{4/8} x 33^{6/8} inch

- ¹⁾ Higher pressure available upon request
- ²⁾ Neutral is required in installation
- ³⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved

JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com

