


6000-150B (oil-less)

Voltage	V	3x200	3x200	3x208	3x400 ²⁾	3x440 ²⁾								
Frequency	Hz	50	60	60	50	60								
Motor	HP	4.5	4.5	4.5	4.5	4.5								
	kW	3.3	3.3	3.3	3.3	3.3								
Displacement	l/min	528	636	636	528	636								
	CFM	18.65	22.46	22.46	18.65	22.46								
FAD @ 8 bar	l/min	270	330	330	270	330								
	CFM	9.53	11.65	11.65	9.53	11.65								
Max. pressure ¹⁾	bar	8	8	8	8	8								
	psi	120	120	120	120	120								
Max. current	A	13.0	13.0	13.0	10.8	10.8								
Tank size	litres	150	150	150	150	150								
	gallon	39.6	39.6	39.6	39.6	39.6								
Weight	kg	167	167	167	167	167								
	lbs	368	368	368	368	368								
Noise level	dB(A)/1m	77	78	78	77	78								
Thermal protection		Yes	Yes	Yes	Yes	Yes								
Duty cycle		100%	100%	100%	100%	100%								

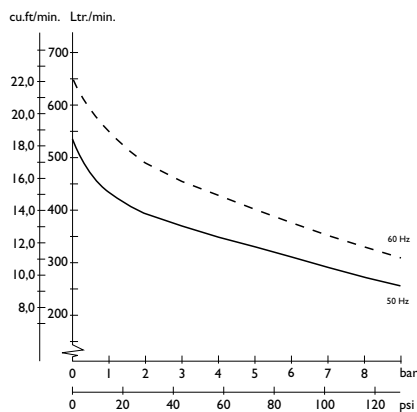

Dimensions (l x w x h)

1280 x 620 x 820 mm / 50³/₈ x 24³/₈ x 32²/₈ inch

¹⁾ Higher pressure available upon request

²⁾ Neutral is required in installation

Technical modifications reserved



JUN-AIR[®]

E-mail: info@jun-air.dk

Internet: www.jun-air.com