


8000-150B (oil-less)

Voltage	V	3x200	3x200	3x208	3x400 ²⁾	3x440 ²⁾								
Frequency	Hz	50	60	60	50	60								
Motor	HP	6.0	6.0	6.0	6.0	6.0								
	kW	4.4	4.4	4.4	4.4	4.4								
Displacement	l/min	704	848	848	704	848								
	CFM	24.86	29.95	29.95	24.86	29.95								
FAD @ 8 bar	l/min	360	440	440	360	440								
	CFM	12.71	15.54	15.54	12.71	15.54								
Max. pressure ¹⁾	bar	8	8	8	8	8								
	psi	120	120	120	120	120								
Max. current	A	19.2	19.2	19.2	14.4	14.4								
Tank size	litres	150	150	150	150	150								
	gallon	39.6	39.6	39.6	39.6	39.6								
Weight	kg	200	200	200	200	200								
	lbs	441	441	441	441	441								
Noise level	dB(A)/1m	79	80	80	79	80								
Thermal protection		Yes	Yes	Yes	Yes	Yes								
Duty cycle		100%	100%	100%	100%	100%								

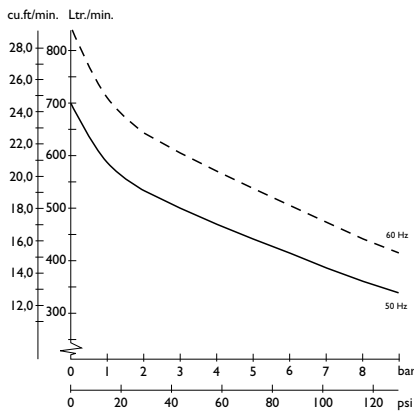

Dimensions (l x w x h)
1280 x 620 x 820 mm / 50³/₈ x 24³/₈ x 32²/₈ inch

- ¹⁾ Higher pressure available upon request
- ²⁾ Neutral is required in installation

Technical modifications reserved



JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com